



2632  
CN

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant : Ian Richard Aldred  
Serial No. : 10/039,280  
Filed : January 2, 2002  
Title : DETECTOR DEVICE

Art Unit : 2632  
Examiner : Son Tang

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

TRANSMITTAL OF PRIORITY DOCUMENT UNDER 35 USC §119

Applicant hereby confirms his claim of priority under 35 USC §119 from the following application(s):

· 0130324.7, filed December 19, 2001

A certified copy of this application from which priority is claimed is submitted herewith.

Please apply any charges or credits to Deposit Account No. 06-1050, referencing Attorney Docket Number 13804-002001.

Respectfully submitted,

Date: July 14, 2005

*Frank R. Occhiuti*

Frank R. Occhiuti  
Reg. No. 35,306

Fish & Richardson P.C.  
225 Franklin Street  
Boston, MA 02110  
Telephone: (617) 542-5070  
Facsimile: (617) 542-8906

21126824.doc

CERTIFICATE OF MAILING BY FIRST CLASS MAIL

I hereby certify under 37 CFR §1.8(a) that this correspondence is being deposited with the United States Postal Service as first class mail with sufficient postage on the date indicated below and is addressed to the Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450.

Date of Deposit

July 14, 2005

Signature

MF 14

Melissa Kruggel

Typed or Printed Name of Person Signing Certificate



INVESTOR IN PEOPLE

**BEST AVAILABLE COPY**

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

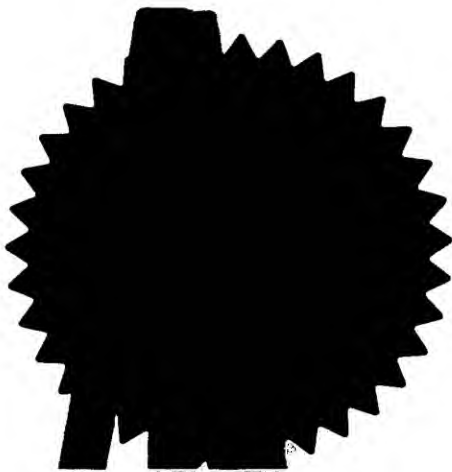

Signed

Dated 24 June 2005

## Patents Form 1/77

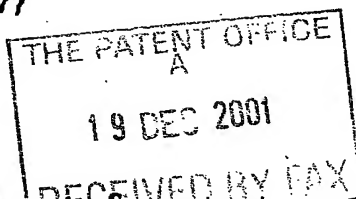Patents Act 1977  
(Rule 16)The  
Patent  
Office1905001 5653113-2 002973  
P717700 1.00-0130324.7

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

BEST AVAILABLE COPY

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

## 1. Your reference

P71774GB

## 2. Patent application number

(The Patent Office will fill in this part)

0130324.7

19 DEC 2001

## 3. Full name, address and postcode of the or of each applicant (underline all surnames)

Microwave Solutions Limited  
Elstree Way  
Borehamwood  
Hertfordshire  
WD6 1RX

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

07457518001

United Kingdom. AL 14.1.02

## 4. Title of the invention

Detector Device

## 5. Name of your agent (if you have one)

"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(including the postcode)Harrison Goddard Foote  
Fountain Precinct  
Balm Green  
Sheffield  
S1 2JA

SB

8/1/04

Patents ADP number (if you know it)

7914237001

## 6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)Date of filing  
(day / month / year)

## 7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

## 8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

yes

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

## Continuation sheets of this form

Description	12
Claim(s)	4
Abstract	1
Drawing(s)	2

10. If you are also filing any of the following, state how many against each item.

## Priority documents

## Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature *Harry Hutchinson*

Date

19 December 2001

12. Name and daytime telephone number of person to contact in the United Kingdom

Harry Hutchinson

0114 274 3702

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

## DETECTOR DEVICE

Field of the Invention

5           The present invention relates to a detector device and, more particularly, to such a device comprising a self-diagnosis capability.

Background to the Invention

10

Present day motion detector devices rely upon the Doppler principle, as is well known within the art, to detect the presence of a moving object within a protected volume or volume to be surveyed. Conventionally, such  
15 motion detector devices use at least microwave technology, that is, typically X-band or K-Band signals transmitted and received via a transceiver. Post-reception, the received signals are suitably processed to identify the presence of a Doppler signal that can be  
20 attributed to movement within the protected volume.

Relatively sensitive devices such as, for example, the mixer, which typically takes the form of a mixer diode, can be easily damaged by inappropriate handling or  
25 excessive signal strengths. Therefore, care needs to be taken in the fabrication and the installation of the motion detector devices. Notwithstanding any such care, the mixer diodes may, post-installation, be inappropriately exposed to signals or handling that may  
30 cause damage. It will be appreciated that any such damage may, in the worst case, prevent the motion detector device from operating correctly in that, from the perspective of the output of the mixer diode, there will be no change in the signal due to any Doppler  
35 shifted received signal. Alternatively, the performance

of the mixer diode may be degraded in some way so that it produces excessive noise which reduces the sensitivity of the motion detector device.

- 5           It is an object of the present invention at least to mitigate some of the problems of the prior art.

Summary of Invention

- 10           Accordingly, a first aspect of the present invention provides a detector device comprising at least a field-distortor, responsive to an input signal, for influencing at least one characteristic of a first electro-magnetic signal carried by a first conductor; and a mixer for  
15 combining at least the influenced first electro-magnetic signal (the RF signal) with a second signal (the local oscillator signal), to produce a combined signal (IF signal) having a characteristic determined by the input signal.

- 20           In a preferred embodiment, the field-distortor for influencing at least one characteristic of the first electro-magnetic signal is operable to vary at least the phase and preferably the phase and magnitude of the first  
25 electro-magnetic signal when that first signal is carried by the conductor.

- Preferably, an embodiment is provided in which the field distortor comprises a semi-conductor device  
30 disposed adjacent to the conductor carrying the first signal. It will be appreciated that the semi-conductor device should be positioned sufficiently close to the conductor so as to be able to influence the electro-magnetic field of the first signal being carried by the  
35 conductor.

In a preferred embodiment, the degree of influence exerted by the field distortor varies with variations in the applied signal. Preferably, the applied signal is  
5 modulated at a predetermined frequency. The predetermined frequency is preferably between 10Hz and 80Hz, these being typical Doppler frequencies that would be generated by a human moving within a protected volume. Additionally, the applied signal is arranged to switch  
10 the field distortor between substantially open and substantially closed circuit conditions.

In preferred embodiments, the field distortor does not radiate or generate an electro-magnetic field in  
15 response to the input signal.

In a preferred embodiment the semi-conductor device is a diode.

20 It will be appreciated that the output of the mixer, having had one of the input signals influenced by the field distortor, can be used by a signal analysis system comprising, for example, a micro-processor and associated software, to determine whether or not the mixer and/or  
25 the device as a whole is functioning correctly. Suitably, an embodiment additionally comprises a signal analyser for analysing the combined signal to determine whether that combined signal has predetermined characteristics. In preferred embodiments the  
30 predetermined characteristics include at least an oscillation having a frequency that is associated with the frequency of the input signal.

To test the operation of the mixer an appropriate  
35 input signal should be applied to the field distortor.

Suitably, an embodiment provides a signal generator for generating the input signal to be applied to the field distortor for influencing the electro-magnetic field.

5           It will be appreciated that the second signal fed into the mixer is conventionally a divided portion of the output of a local oscillator; the other portion having been, in operation, radiated by a transmit antenna. In the absence of motion, the RF signal on the input to the  
10       mixer is at the same frequency as the LO signal. The mixer then operates as a phase detector and produces a DC voltage at its output that is related to the phase difference between the LO and RF signal and the magnitude of the RF signal. Hence, by disturbing at least the  
15       phase and, preferably, the phase and magnitude of the RF input signal to the mixer, an output signal indicative of that disturbance will be produced by the mixer.

#### Brief Description of the Drawings

20

Embodiments of the present invention will now be described, by way of example only, with reference to the accompanying drawings in which:

figure 1 illustrates schematically a motion  
25       detection system having a self-diagnosis capability in accordance with a first embodiment of the present invention; and

figure 2 illustrates a detector device for use in  
such a motion detection system in accordance with an  
30       embodiment of the present invention.

#### Description of the Preferred Embodiments

Referring to figure 1 there is shown schematically a  
35       motion detection system 100 comprising a detector device



5

102 which co-operates with a detection system 104 to detect relative motion between the device and a body 106 within a monitored volume 108 and to produce a corresponding alarm signal via an output device 110 in response to the detection of any such relative motion. The output device maybe an audio-visual output device.

The detector device 102 comprises a local oscillator 112 for generating K or X-band microwave signals that are radiated into the monitored or protected volume 108 via a transmit antenna 114. A portion of the output of the local oscillator signal 112 is directed towards a mixer 116 which combines that portion with an RF input signal 122, carried on a conductor 118, that has been received by a receive antenna 120. Typically, in the presence of relative motion between the device and the body, the RF input signal 122 is a reflected and Doppler shifted version of the transmitted signal 124. The output of the mixer, that is, the IF signal 126, is input into the detection system 104 which, if appropriate, can instruct an alarm-fault generator 130 to generate an appropriate alarm signal to be output via the audio-visual output device 110.

The detector device also comprises a field distortor 132 for influencing the electro-magnetic field of the RF input signal being carried by the conductor 118. Preferably, the field distortor 132 takes the form of a diode that, in response to an applied signal 136, causes a change in the electro-magnetic field carried by the conductor. In particular, the field distortor influences the phase of the RF input signal (at the RF input port) of the mixer 116.

In the absence of motion, the mixer 116 acts as a

phase (detector) and produces a DC output signal in response to receiving an input signal on the port that would ordinarily receive the received signal 122, that is, on the RF input port of the mixer. This input signal  
5 is a combination of the received signal 122 reflected from static objects within the protected volume 108 and signals generated within the detector device 102 due to internal reflections.

10 Referring to figure 2 there is shown in greater detail a circuit 200 for realising an embodiment of the detector device 102 according to the present invention. The circuit 200 comprises a local oscillator circuit 202, that is coupled, via a decoupling capacitor 204 to a  
15 transmit antenna feed portion 206 and a receive antenna portion 208 of the circuit. The device also comprises a test portion 210. The various portions 202 to 210 are screened via appropriate planar metalisations 212 having holes drilled therein to suppress unwanted spurious  
20 electro-magnetic emissions from the various circuit elements.

A series of connection tabs 214 are provided to allow power to be supplied to the circuit elements 202 to  
25 210 and to allow the IF signal to be received as well as to allow a test signal to be applied to the test portion 210. The connection tabs 214 comprise a ground connection tab 216 and an IF output connection tab 218. The IF output connection tab 218 also serves as the  
30 output for the signal generated as a result of testing the operation of the receive portion 208. It will be appreciated that the test diode 242 tests the whole of the operation of the detector, that is, the local oscillator, the mixer and the transmit and receive  
35 antennas. A test signal connection tab 220 is arranged

to provide the test signal to the test portion 210 of the device. Power is supplied to the local oscillator circuit 202 via a power connection tab 222.

5       The local oscillator circuit 202 comprises, in a preferred embodiment, a dielectric puck 224 disposed adjacent to a pair of strip lines 226 and 228 that are connected to one another via the gate and drain of a FET transistor. Power is supplied to the transistor via the  
10 power connection tab 222 and a resistor 230. The output of the transistor is coupled via the decoupling capacitor 204 to the transmit and receive portions 206 and 208 where that power is divided in a predetermined ratio. The power carried by a microstrip line 232 of the  
15 transmit portion 206 is coupled via a slot in a ground plane (not shown), preferably, to a pair of patch transmit antennas (not shown) as is well known within the art. An example of a detector device within which the present invention can be incorporated is shown in UK  
20 patent application no. GB2253108, the content of which is incorporated herein for all purposes.

Similarly, power is coupled to a microstrip line 234 of the receive portion via a corresponding slot in a  
25 ground plane (not shown) and an associated pair of patch receive antennas (not shown).

It can be appreciated that the diode mixer 236 of the receive portion 208 receives power from the local  
30 oscillator via a corresponding microstrip line 238 and also from the microstrip line 234. The output of the mixer diode 236 is fed to the IF output tab 218 for further processing by the detection system 104 and, more particularly, by a signal analyser 128.

35

The test portion 210, in a preferred embodiment, comprises the series arrangement of a resistor 240 and the test diode 242. The diode 242 is disposed within close proximity to a conductor or microstrip line 244 which couples power from the receive microstrip line 234 to the receive RF input of the diode mixer 236. The diode 242 is positioned sufficiently close to the microstrip line conductor 244 such that, in the presence of the signal applied to the test signal connection tab 220, the variation in diode 242 characteristics is sufficient to vary the degree of influence experienced by the electro-magnetic field of the signal being coupled from the receive microstrip line 234 to the receive RF input of the diode mixer 236 in the vicinity of microstrip line 244. In a preferred embodiment, the electro-magnetic field perturbation caused by the change in diode characteristics in response to the applied signal imparts at least a phase change to the signal carried by the microstrip line 244. As the microstrip line 244 couples power to the RF port of the mixer, that is, the receive RF input of the diode mixer 236, a corresponding phase change occurs at the RF port of the mixer.

It will be appreciated in the absence of motion, that is, in the absence of the received signal being a Doppler shifted version of the transmitted signal, that the mixer diode 236 operates as a phase detector which generates a DC voltage that is dependent upon the relative phases and magnitudes of the signals present at the local oscillator input port and the RF input port of the mixer. The two signals are in fact each the resultant of a vector summation of all signals appearing at each of the two ports. Therefore by influencing one of those signals, as in the preferred embodiment, the phase of the

resultant signal at the RF input port can be changed. In turn this will change the DC voltage present on the IF output tab 218.

5            Preferably, the test signal applied to the test signal connection tab 220 is arranged to be a TTL signal (0V to +5V) at a frequency that is within the bandwidth of the amplifiers contained within the signal analyser 128 that is connected to the IF output tab 218. For  
10            example, embodiments may use a test signal having a frequency of 30Hz.

            The detection system 104 uses the signal analyser 128 to monitor the IF output 218 to determine whether or  
15            not an intrusion into the protected volume 108 has been detected during conventional operation of the system 100. In the event that the signal analyser 128 determines that an intrusion into the protected volume 108 has been detected, the signal analyser 128 instructs the alarm-  
20            fault signal generator 130 to produce at least one of an audible or visual alarm signal via the output device 110 or to output an alarm condition signal for further processing by, for example, a central control centre.

25            However, during a test mode of operation of the detection system, the signal analyser 128 supplies an appropriate test signal to the test signal connection tab 220 during the normal operation of the detector device 102, that is, during the conventional transmit and  
30            receive operations of the detector device 102. The signal analyser 128, again, monitors the IF output tab 218 and in the absence of the IF output signal meeting predetermined criteria, the signal analyser 128 instructs the alarm-fault generator 130 to produce a fault  
35            indication signal that is output via a fault indicator

138. It will be appreciated that the testing preferably takes place in the absence of motion of a body within the protected volume. The predetermined criteria include the magnitude of the IF signal being disposed above or below  
5 a particular threshold. The fault indication signal can equally well or additionally be output to a central control centre.

Advantageously, the correct operation or otherwise  
10 of the detector device 102 can be monitored in a predetermined and controlled manner and also in the absence of external test equipment that is conventionally used to monitor such operation.

15 It will be appreciated that a conventional diode, such as a BAS 16, can be used in the preferred embodiments. However, the embodiments are not restricted to such an arrangement. Embodiments can equally well be realised in which other devices could be used such as,  
20 for example, a microwave diode, a FET, a further mixer or the like, providing the characteristics of the device vary in response to an applied test signal in such a manner as to influence the electro-magnetic field carried by the microstrip lines to the RF input of the mixer.

25

Although the above embodiments have been described with reference to detecting movement within a protected volume, the present invention is not limited to such an application. It will be appreciated by those skilled in  
30 the art that the invention is equally applicable to relative motion between the detector device and a body whether the body is stationary and the detector is moving or both the body and detector are moving relative to each other.

35

The above embodiments have been described with reference to a field distortor that influences or modifies the electro-magnetic field passing through it. It does not radiate electro-magnetic energy as a  
5 microwave oscillator would for example, at least not intentionally or not to a sufficient degree to influence the field carried by the conductor. However, it will be appreciated that embodiments of the present invention can be realised in which the field distortor does radiate an  
10 electro-magnetic field, in response to an input signal or otherwise, which influences the signal or electro-magnetic field present at the RF input port of the mixer. The field present at that port will be generated by superposition of the generated field and the received RF  
15 field. This superposition may be in addition to the influencing of the field described above in the preferred embodiments.

The reader's attention is directed to all papers and  
20 documents which are filed concurrently with or previous to this specification in connection with this application and which are open to public inspection with this specification, and the contents of all such papers and documents are incorporated herein by reference.

25

All of the features disclosed in this specification (including any accompanying claims, abstract and drawings), and/or all of the steps of any method or process so disclosed, may be combined in any combination,  
30 except combinations where at least some of such features and/or steps are mutually exclusive.

Each feature disclosed in this specification (including any accompanying claims, abstract and  
35 drawings), may be replaced by alternative features

12

serving the same, equivalent or similar purpose, unless expressly stated otherwise. Thus, unless expressly stated otherwise, each feature disclosed is one example only of a generic series of equivalent or similar features.

The invention is not restricted to the details of any foregoing embodiments. The invention extends to any novel one, or any novel combination, of the features disclosed in this specification (including any accompanying claims, abstract and drawings), or to any novel one, or any novel combination, of the steps of any method or process so disclosed.



13

## CLAIMS

1. A detector device comprising at least a field-distortor, responsive to an input signal, for  
5 influencing at least one characteristic of a first electro-magnetic signal; and a mixer for combining at least the influenced first electro-magnetic signal and a second signal to produce a combined signal having a characteristic determined by the  
10 input signal.
2. A detector device as claimed in claim 1, in which the field-distortor is operable to change the phase of the first electro-magnetic signal.  
15
3. A detector device as claimed in either of claims 1 and 2, in which the field-distortor comprises a semi-conductor device disposed adjacent to a first conductor for carrying the first electro-magnetic  
20 signal.
4. A detector device as claimed in claim 3, in which the field-distortor is a semi-conductor device, preferably, a diode.  
25
5. A detector device as claimed in any preceding claim, further comprising a signal generator for generating the input signal.
- 30 6. A detector device as claimed in any preceding claim, further comprising a transceiver for transmitting and receiving electro-magnetic signals.
- 35 7. A detector device as claimed in claim 6, in which the transceiver comprises at least one of a transmit

14

antenna and a receive antenna for transmitting an electro-magnetic signal and receiving a received signal respectively; the received signal being derived from the transmitted electro-magnetic signal.

5

8. A detector device as claimed in claim 7, in which the first electro-magnetic signal is derived from the received signal.

10

9. A detector device as claimed in claim 7, in which the first electro-magnetic signal is derived from the transmitted signal.

15

10. A detector device as claimed in any of claims 7 to 9, in which the second signal is derived from the received signal.

20

11. A detector device as claimed in any of claims 7 to 9, in which the second signal is derived from an oscillator for generating the transmit signal.

12. A detector device as claimed in any preceding claim, further comprising a signal analyser for monitoring the characteristic of the combined signal to determine the correct operation or otherwise of at least one element of the detector device.

25

13. A detector device as claimed in claim 12, in which the at least one element is at least one of a mixer, transmitter, oscillator and receive portion.

30

14. A detector device as claimed in any preceding claim, in which the field-distortor does not radiate an electro-magnetic field in response to the input

35

15

signal.

15. A detector device as claimed in any of claims 1 to 13, in which the field-distortor is arranged to radiate an electro-magnetic field in response to the input signal.
16. A detector device as claimed in any preceding claim, in which the field-distortor is spaced apart from the conductor without any physical connection therebetween.
17. A detector device substantially as described herein with reference to and/or as illustrated in the accompanying drawings.
18. A motion detection system comprising a detector device as claimed in any preceding claim.
19. A method of operating a detector device comprising at least one circuit element and a conductor bearing a first electro-magnetic signal; the circuit element being disposed adjacent to the conductor; the method comprising the steps of applying a signal to the circuit element to vary the electrical or electro-magnetic characteristics of the circuit element and thereby influence at least one characteristic of the first electro-magnetic signal; and producing an output signal indicative of the degree of influence exerted on the first electro-magnetic signal.
20. A method as claimed in claim 19, in which the motion detection device is a device as claimed in any of claims 1 to 17.

35

16

21. A method of operating a motion detection device substantially as described herein with reference to and/or as illustrated in the accompanying drawings.

**ABSTRACT**  
**DETECTOR DEVICE**

5

The present invention relates to a detector device and, more particularly, to a detector device comprising a self-diagnosis means for monitoring the correct performance or otherwise of the device. During testing, the device, which normally operates using the Doppler shift principle, is arranged to influence the phase and/or amplitude of the received signal in response to an applied test signal. The received signal may be a Doppler shifted version of a transmitted signal. Combining the phase and/or amplitude shifted version of the received signal and the signal from the local oscillator produces an IF signal that is indicative of the phase and/or amplitude shift. If the device is operating correctly, that signal should have a predetermined range of characteristics. If the self-diagnosis means determines that the produced signal falls outside of the predetermined range of characteristics, an alarm is raised to alert, for example, maintenance personnel to the problem.

25

(figure 1)

1/2

Figure 1


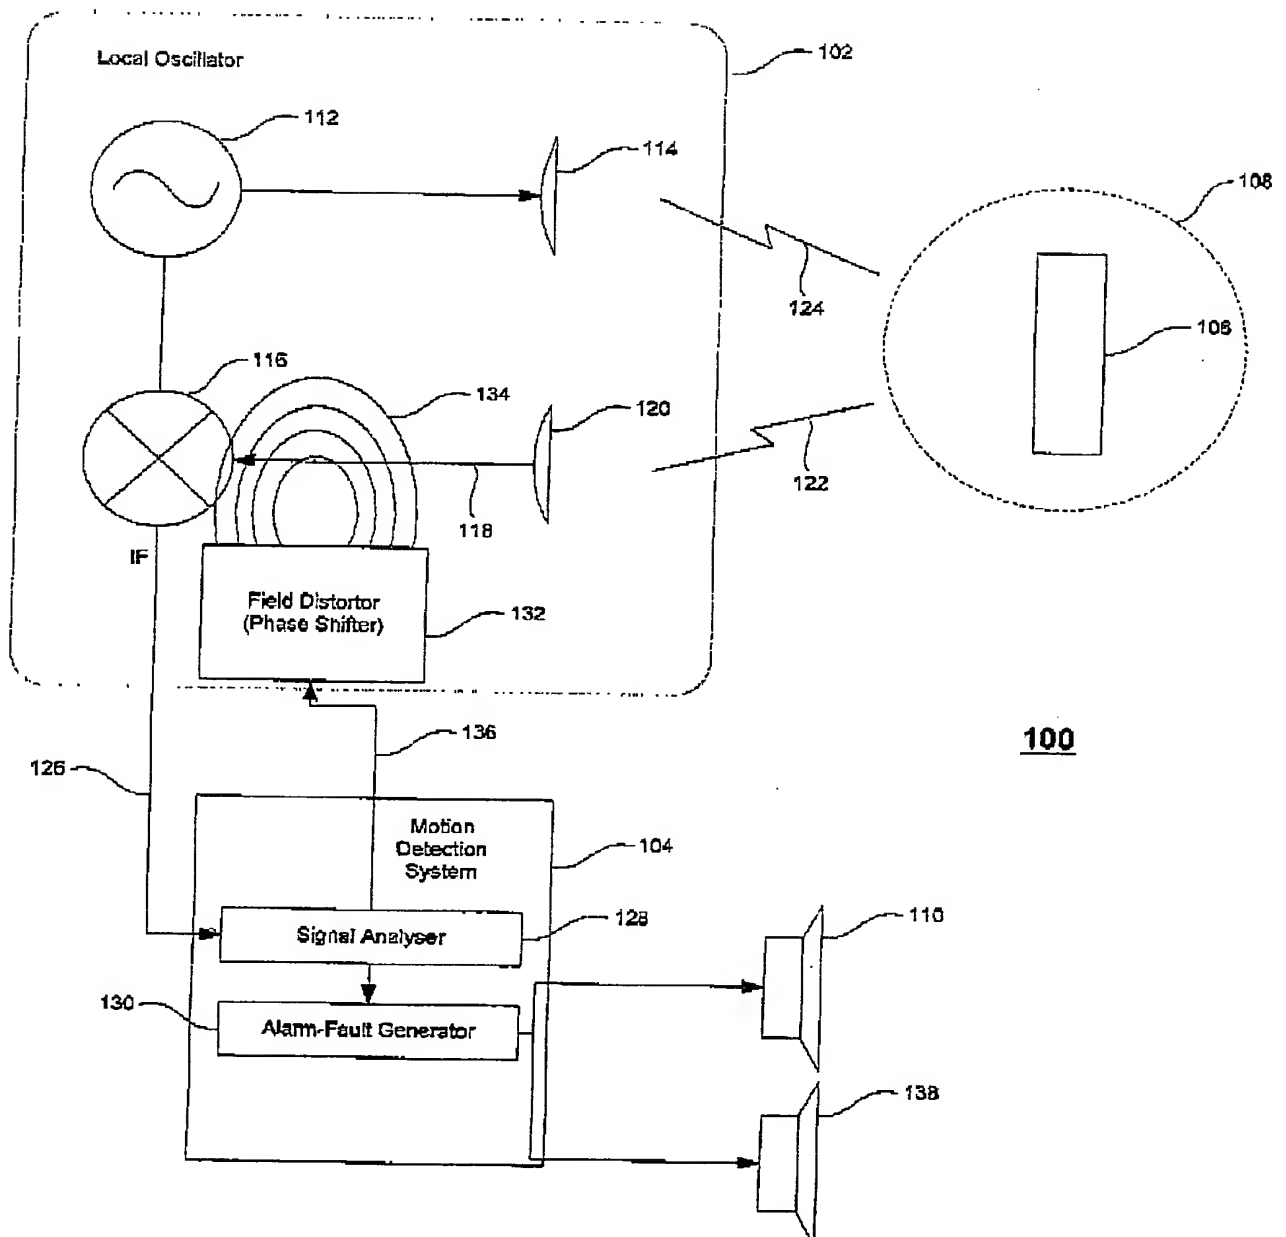
100

FIGURE 2

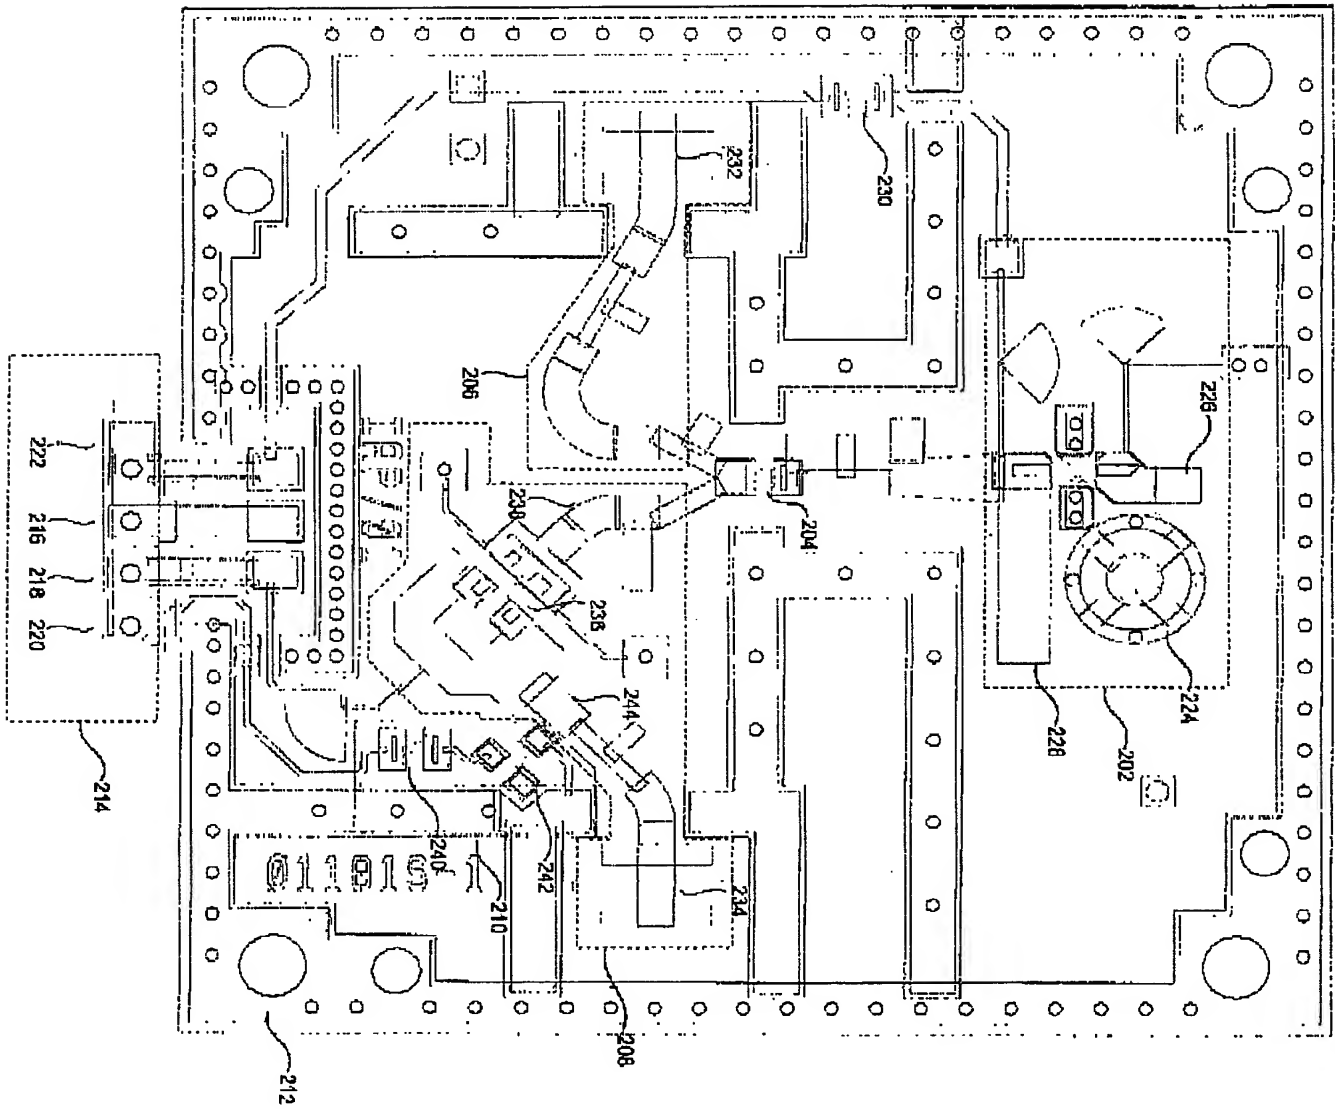

200

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**